

## Application of Mathematical Models for Predicting the Trihalomethanes Content in Drinking Water in the City of Struga, North Macedonia

Bujar H. Durmishi<sup>1\*</sup>, Arbana Durmishi<sup>1</sup>, Pajtim S. Bytiçi<sup>2</sup>, Arianit A. Reka<sup>1</sup>, Agim Shabani<sup>1</sup>

<sup>1</sup>Department of Chemistry, Faculty of Natural Sciences and Mathematics, University of Tetova, Str. Ilindeni n.n., 1200 Tetova, Republic of North Macedonia

<sup>2</sup>Food Science and Biotechnology, UBT-Higher Education Institution, Republic of Kosova

**\*Corresponding Authors:** Bujar H. Durmishi, Department of Chemistry, Faculty of Natural Sciences and Mathematics, University of Tetova, Str. Ilindeni n.n., 1200 Tetova, Republic of North Macedonia

**Abstract:** Trihalomethanes (THMs) are the main disinfection byproducts created when chlorine reacts with organic matter of the drinking water. THMs in high concentrations are harmful and can be carcinogenic for the liver, pancreas, nervous system, development organs, whereas in women can cause miscarriage. Therefore, THMs recently have concerned very much the scientific community and the general public. Consequently, THMs must be constantly monitored. THMs mainly are determined by the gas chromatography method, which is a difficult procedure and very costly. To avoid this, in the past years the use of mathematical models for prediction of THMs in drinking water is practiced. By fast measuring of the values of some simple parameters of drinking water quality and replacing them in the mathematical models we can predict the THMs content. The aim of this article was the prediction of the THMs content in drinking water in the city of Struga for the spring of 2021 in four sampling points S1, S2, S3 and S4. The measured parameters and their average values with standard deviation were: water temperature ( $13.56 \pm 1.17$  °C), residual chlorine ( $0.20 \pm 0.00$  mg/L), pH ( $7.58 \pm 0.03$ ), electrical conductivity ( $250.89 \pm 9.37$   $\mu$ S/cm), chemical oxygen demand ( $1.53 \pm 0.06$  mg/L), total dissolved solids, ( $407.67 \pm 2.89$  mg/L) and chlorides ( $5.26 \pm 0.32$  mg/L), respectively. These values are then placed in mathematical models and with calculation is predicted the THMs content in drinking water. For prediction were used ten mathematical models and the average value of the THMs with standard deviation was  $27.40 \pm 10.67$   $\mu$ g/L. From the results we can conclude that the used models for THMs prediction have resulted successful and this content of THMs pose no risk to public health.

**Keywords:** THMs, physico-chemical parameters, drinking water, mathematical models for prediction, health

### 1. INTRODUCTION

Disinfection by-products (DBPs) are a class of chemicals that are formed when disinfectants react with organic compounds of drinking water [1]. Some of the DBPs may be carcinogenic and some are suspected of causing health effects. They are undesirable chemical compounds that are created as a result of water disinfection and oxidation. According to Krasner *et al.*, DBPs are classified into four major classes: trihalomethanes (THMs), haloacetic acids (HAAs), haloacetonitriles (HANs) and halocetones (HKs) [2]. So, a special class of DBPs are THMs, which in addition to carbon, they also contain chlorine and bromine.

THMs were discovered in 1974 by Rook (Netherlands) and Bellar (USA). They first identified chloroform ( $\text{CHCl}_3$ ), which is the main THMs in drinking water and are in trace concentration ( $\mu$ g/L). After that date, many other DBPs were identified in chlorinated drinking water, eg. brominated THMs, haloacetic acids, halocetones etc. More than 500 DBPs have been identified in tap waters and since 1980 they have raised great concern due to the fact that they cause side effects in human health, cancer and reproductive disorders [3].

Interest in studying organic substances in drinking water began in 1974 with the detection of haloforms or trihalomethanes by Rook J. during the quality control of water treatment at the Berenplaat, Netherlands [4]. THMs as synthetic organic compounds are created by replacement of three hydrogen

atoms in the methane molecule with the atoms of the halogen elements. Chloroform or trichloromethane ( $\text{CHCl}_3$ ), bromochloromethane ( $\text{CHBrCl}_2$ ), dibromochloromethane ( $\text{CHBr}_2\text{Cl}$ ) and bromoform or tribromomethane ( $\text{CHBr}_3$ ) can be formed during chlorination. Their formation during chlorination represents a very serious health problem as chloroform, main subspecies of THMs formed in this process, implicated in several types of cancers in laboratory animals.

In recent years, modeling for predicting of THM concentration is the contemporary trend. Relevant models are developed with adequate statistical processing of THMs data with the help of statistical programs. Statistical software used for this purpose are, Statistical Package for the Social Sciences (SPSS), Statgraphics etc. The models confirm the empirical or mechanical correlation between THMs contents in drinking water and water quality parameters and their control may be related to the formation of THMs. These models are applied based on routine measurements of some drinking water parameters and with their help predict (calculate) the concentration of THMs in drinking water. These models are use friendly and can be used by any worker in the drinking water plant to estimate the concentration of THM at any given time.

A number of models have been developed to predict mathematically the total THMs (TTHMs) from the water source characteristics. This enables the calculation of TTHMs without the need for intensive sampling. *Golfinopoulos et al.*, developed a model for TTHMs depending on chlorophyll a, pH, bromine concentration, season, temperature and chlorine concentration [5]. The model showed that the concentration of TTHMs increases with the concentration of chlorophyll a, bromine ion concentration, temperature, chlorine concentration, and whether the samples were taken in spring or summer. According to him TTHMs concentration decreases with pH and temperature of the samples in the spring and summer season. Rodriguez and Serodes developed a model for predicting TTHMs in finished water in three plants and TTHMs producing at distribution system points [6]. In two plants it was found that the temperature was the only significant variable and TTHMs concentration increased with temperature. For the third plant the temperature, pH and flow rate were important variables. It was noted that the concentration of TTHMs increased with temperature, and decreased with pH and flow. *Villanova et al.*, developed a model in two Torres river water treatment plants in the city of Salamanca, Spain [7]. This one-year research showed that temperature and pH were the only variables important for the formation of chloroform. Observed results versus calculated values had a high value of  $R^2 = 0.99$ . As we can see, simple and some very complicated models for the THMs prediction have been developed.

Statistical analysis of results with multifactor variance analysis has revealed the influence of the parameters in the formation of THMs. The simple and multiple regression were used to develop predictive models for THMs formation. These models serve to predict concentrations of THMs in drinking water after monitoring the THMs and following relevant experiments on the impact of various factors on THMs concentration in drinking water. Each developed model is suitable only for drinking water with similar characteristics. So, a similar model cannot be used to predict THMs in drinking water of different locations with different characteristics and qualities [1].

Thus, Elshorbagy has modeled the formation of different THMs under strictly extreme conditions of chlorine concentration, temperature and bromine ion concentration [8]. Clark and Mano developed a mathematical model that predicts THMs concentration as a function of pH, temperature, initial chlorine concentration and total organic carbon (TOC) [9]. Montgomery Watson Consulting Engineering modeled the THMs formation associated with TOC, pH, temperature, chlorine concentration, bromine ion concentration and contact time [10]. Some other researchers such as *Clark et al.*, studied the effect of the bromine ion concentration on THMs formation [11]. Other researcher studying the effect of other factors in THMs formation. Karimi and Singer reported a strong correlation between algae productivity and THM formation potential (THMFP) [12]. *Canale et al.*, link THMFP with chlorophyll, zooplankton, water depth, dissolved oxygen and total phosphorus [13]. The aim of this paper was the prediction of the THMs content in drinking water in the city of Struga for the spring 2021.

## **2. MATERIALS AND METHODS**

### **2.1. Sampling Stations, Periods and Sampling**

Drinking water sampling stations are appropriately selected. Four stations (S1 - S4) have been designated in the city of Struga. Serious account has been taken of the distance between the stations in order to cover a certain part of the city's territory as well as possible and to enable logical conclusions

to be drawn. The stations were: S1 - Hospital; S2 - Source in the village of Shum, S3 - Niko Nestor High School and S4 - Institute of Nephrology. From the mentioned stations, drinking water samples were taken every week in the months of April, May and June of 2021 (spring season) to determine the values of some of the most necessary drinking water quality parameters. These parameters have been imperative for predicting the concentration of THMs with mathematical models.

The method of sampling has a great influence on the obtained results of the analyses. Sampling was done according to the recommendations of the State Regulation on drinking water of the Republic of North Macedonia, which is harmonized with WHO and EU recommendations [14]. Drinking water samples were taken in polyethylene and glass bottles with a volume of 1.5 L. We filled the bottles up to the lid without leaving space and air bubbles in the sample.

## **2.2. Measured Parameters, Reagents and Instruments**

In this paper, in the spring season, the monitoring of the seven most important drinking water parameters was carried out: water temperature (WT), residual chlorine (RC), pH, electrolytic conductivity (EC), total dissolved solids (TDS), chemical oxygen demand (COD) and chlorides.

The experimental part of the paper was carried out in the field, while COD and chlorides were measured in the laboratories of the University of Tetova. For the realization of this research, relevant methodology has been used and standard methods and techniques of measuring parameters have been used in accordance with the State Regulation for drinking water. Standard physico-chemical methods were used to determine the parameters.

The following reagents were used to measure the parameters: 1) tetra-methyl-benzidine (reagent for residual chlorine), 2) buffer solutions 4, 7 and 9 (for pH-meter calibration), 3) standard KCl solution (for calibration of the conductometer), 4) H<sub>2</sub>SO<sub>4</sub> solution (1:3), 5) KMnO<sub>4</sub> solution with  $c = 0.002 \text{ mol/dm}^3$ , 6) H<sub>2</sub>C<sub>2</sub>O<sub>4</sub> solution with  $c = 0.002 \text{ mol/dm}^3$ , 7) 10% K<sub>2</sub>CrO<sub>4</sub> solution (indicator for determination of chlorides) and 8) AgNO<sub>3</sub> solution with  $c = 0.0281 \text{ mol/dm}^3$ .

The following equipment and instruments were used to determine the physico-chemical parameters: a thermometer was used to measure the temperature (an integral part of the conductometer), a portable Conductivity Meter, WTW LF 320, was used to measure EC and TDS; pH measurement was done with a portable pH meter 330i, WTW; RC was measured colorimetrically with a comparator; chlorides were determined by argentometric titration and COD was determined by standard procedure using oxidizing reagents KMnO<sub>4</sub> and H<sub>2</sub>C<sub>2</sub>O<sub>4</sub>.

## **3. RESULTS AND DISCUSSION**

The results of the measurements of this paper are presented in Figure 1 and Table 1.

### **3.1. Water Temperature (WT)**

Temperature plays a crucial role in the physico-chemical and biological behavior of the water system [15]. Chemical reactions depend on water temperature and it controls the metabolic and reproductive processes of aquatic species. The water samples analyzed from the drinking water of the city of Struga had approximate temperatures, but exceeded the recommended value of the State Regulation. The range for WT was 11.00 - 16.00 °C. The lowest temperature of 12.33 °C was found in the month of April in S1, while the highest temperature of 14.6 °C was found in the month of June in S3. The average water temperature values in the months of April, May and June were 12.3, 13.6 and 14.6 respectively. The average seasonal value with standard deviation was  $13.56 \pm 1.17 \text{ °C}$ . The values of this parameter were higher compared to the State Regulation for drinking water (Fig. 1).

### **3.2. Residual Chlorine (RC)**

RC is of great importance to determine the presence or absence of microorganisms in drinking water. Its presence in drinking water indicates that a sufficient amount of chlorine has been added to the water first to inactivate bacteria and some viruses that cause diseases such as diarrhea and also to protect the water from recontamination during storage. The range for RC was 0.00 - 0.20 mg/L (Fig. 1). The same value was measured at 0.20 mg/L in S1, S3 and S4, i.e. in the months of April, May and June (with the exception of values of 0.00 mg/L in S2 since the spring water was not chlorinated). So, the average values in the months of April, May and June were 0.20, 0.20. and 0.20 mg/L, respectively. The average

seasonal value with standard deviation was  $0.20 \pm 0.00$  mg/L, which was in accordance with the recommended value of the state regulation.

### **3.3. pH Value**

The pH value of aquatic ecosystems depends on the chemical and biological activity of the water. Natural waters usually have a pH value higher than 7. This results from CO<sub>2</sub> from the atmosphere and from that which is released from the decomposition of organic matter as well as from human activity. CO<sub>2</sub> dissolves in water and forms carbonic acid (H<sub>2</sub>CO<sub>3</sub>). This acid acts with CaCO<sub>3</sub> of surface water and forms calcium bicarbonate (CaHCO<sub>3</sub>) and as a result natural waters have a value of pH>7. The water samples that we analyzed had pH values with a range of 7.54 - 7.60. The lowest value was in the month of April in S1, while the same values were measured in the months of May and June, S2 and S3. The average values in April, May and June were 7.54, 7.60 and 7.60 respectively (Fig. 1). The average seasonal value with standard deviation was  $7.58 \pm 0.03$ , which was in accordance with the state regulation.

### **3.4. Electrical Conductivity (EC)**

Chemically pure water has low EC. The higher the EC of natural water, the more polluted it will be. In natural waters, mineralization and productivity reactions are similar. Natural water will have less or more mineral matter depending on when these two processes dominate. EC of water indicates the general presence of chemical compounds and is an indicator of water pollution. This parameter in the four stations was different but not very pronounced. Slightly higher values were recorded in S1. Thus, EC values ranged from 191.00 - 391.00  $\mu$ S/cm. The lowest value was measured in June in S3, while the highest value was in April in S1. The average values in April, May and June were 261.67, 246.33, and 244.67 respectively (Fig. 1). The average seasonal value with standard deviation was  $250.89 \pm 9.37$   $\mu$ S/cm, which was within the allowed values of the state regulation.

### **3.5. Chemical Oxygen Demand (COD)**

COD is usually used for the indirect measurement of the amount of organic compounds in water. The main application of COD is to quantify organic pollutants found in surface water or wastewater, making COD a useful measure of water quality. COD is the amount of oxygen required to carry out the oxidation of organic pollution using a strong oxidizing agent. Research conducted on organic pollution of drinking water and liver cancer shows that mortality due to liver cancer is positively correlated COD of with drinking water. COD measurements have varied monthly with a range of 1.5 - 1.60 mg/L. Thus, the lowest values were in S1 and S3 in April and June, while the highest value was in S2 in May (Fig. 1). Average values during the months of April, May and June were 1.5, 1.6 and 1.5 mg/L respectively. The average seasonal value with standard deviation was  $1.53 \pm 0.06$  mg/L, which is within the allowed values of the state regulation.

### **3.6. Total Dissolved Solids (TDS)**

TDS is the term applied to the residue remaining in a mass measuring vessel after the sample has passed through a standard glass fiber filter and dried to constant mass at 103 – 105 °C or 179 - 181°C. Water with high TDS content often has a laxative effect and sometimes the opposite effect on individuals whose bodies are not adapted to it. TDS mainly consists of Ca<sup>2+</sup>, Mg<sup>2+</sup> ions, bicarbonates, carbonates, sulfates, chlorides, nitrates and other substances. High concentration of TDS around 3000 mg/L can also produce disturbance in animals. This parameter in four stations was different but not very pronounced. Thus, the values were brought from 406.00 - 411.00 mg/L. The lowest value was measured in March in S1 and S2, while the highest value was in June in S3 (Fig. 1). The average values during the months of March, April, May and June were 406.00, 406.00, and 411.00 mg/L respectively. The average seasonal value with standard deviation was  $407.67 \pm 2.89$  mg/L, which was lower than the recommended value of the state regulation.

### **3.7. Chlorides**

Chlorides are less dangerous contaminants in drinking water. According to the permitted standards, their content in river waters is quite high. Chloride ions occur naturally in surface and groundwater. They are also found in high concentrations in seawater. Higher than normal chloride concentrations in freshwater are detrimental to water quality. The use of road salt for winter accident prevention is a major



source of chlorides for the environment. Unfortunately, the chloride content has increased over time due to road widening and increased ground traffic. The results of our measurements of chlorides in the drinking water of the city of Struga for 3 months are shown in Fig. 1. Their concentration ranges from 0.80 - 4.3 mg/L. The lowest value was measured at S2 in May, while the highest value measured in April was at S1. The average values during the months of April, May and June were 5.50, 4.90 and 5.37 mg/L respectively. The average seasonal value with standard deviation was  $5.26 \pm 0.32$  mg/L, which was within the allowed values of the state regulation.

### **3.8. Calculation of THM Content Prediction in Drinking Water of the City of Struga by Mathematical Models**

THMs prediction models are implemented based on routine measurements of some drinking water parameters and with their help, the concentration of THMs in drinking water is calculated. These predictive models contain different water quality parameters and individual models typically use three to eight parameters [16] (Babaei *et al.*, 2015). For the THMs prediction in the drinking water of Struga, we have used the equations of the ten mathematical models developed by [1]. Mathematical model equations and the calculation of THMs content are given below. In order to obtain a more reliable results for the prediction of THMs content for the spring season we have obtain the average value with standard deviation  $27.40 \pm 10.67$  µg/L (Table 1).

Calculation by:

#### **Model 1:**

$$THM = -10.925 + 0.688(WT) + 24.387(RC) + 0.461(pH) + 0.046(EC) + 2.076(COD) + 0.713(Chlorides)$$

$$THM = -10.925 + 0.688(13.56) + 24.387(0.20) + 0.461(7.58) + 0.046(250.89) + 2.076(1.53) + 0.713(5.26) = -10.925 + 9.329 + 4.877 + 3.039 + 11.540 + 3.176 + 3.750 = -10.925 + 35.711 = \mathbf{24.78 \mu g/L}$$

#### **Model 2:**

$$THM = 0.889 + 0.822(Chlorides) + 0.068(EC) + 21.205(RC)$$

$$THM = 0.889 + 0.822(5.26) + 0.068(250.89) + 21.205(0.20) = 0.889 + 4.323 + 17.060 + 0.441 = \mathbf{22.71 \mu g/L}$$

#### **Model 3:**

$$THM = 10^{0.152} \cdot (WT)^{1.147} \cdot (RC)^{0.158} \cdot (EC)^{0.458} \cdot (Chlorides)^{0.252} \cdot (pH)^{0.240} / (TDS)^{0.557}$$

$$THM = 10^{0.152} \cdot (13.56)^{1.147} \cdot (0.20)^{0.158} \cdot (250.89)^{0.458} \cdot (5.26)^{0.252} \cdot (7.58)^{0.240} / (407.67)^{0.557} = \mathbf{23.88 \mu g/L}$$

#### **Model 4:**

$$THM = 1.419(WT)^{1.147} \cdot (RC)^{0.158} \cdot (EC)^{0.458} \cdot (Chlorides)^{0.252} \cdot (pH)^{0.240} \cdot (TDS)^{-0.557}$$

$$THM = 1.419(13.56)^{1.147} \cdot (0.20)^{0.158} \cdot (250.89)^{0.458} \cdot (5.26)^{0.252} \cdot (7.58)^{0.240} \cdot (407.67)^{-0.557} = 1.419 \times 19.893 \times 0.775 \times 12.559 \times 1.5194 \times 1.6260 \times 0.0351 = \mathbf{23.83 \mu g/L}$$

#### **Model 5:**

$$\log(THM) = 1.254 + 0.286\log(Chlorides)$$

$$\log(THM) = 1.254 + 0.286\log(5.26) = 1.254 + 0.286 \times 0.720 = 1.254 + 0.205 = 1.455 = 10^{1.455} = \mathbf{28.51 \mu g/L}$$

#### **Model 6:**

$$\log(THM) = 0.113 + 0.256\log(Chlorides) + 1.31\log(WT)$$

$$\log(THM) = 0.113 + 0.256\log(5.26) + 1.31\log(13.56) = 0.113 + 0.256 \times 0.720 + 1.31 \times 1.123 = 1.7684 = 10^{1.7684} = \mathbf{58.67 \mu g/L}$$

**Model 7:**

$$\log(\text{THM}) = 0.364 + 0.282\log(\text{Chlorides}) + 1.689\log(\text{WT}) - 0.372\log(\text{TDS})$$

$$\begin{aligned} \log(\text{THM}) &= 0.364 + 0.282\log(5.26) + 1.689\log(13.56) - 0.372\log(407.67) = \\ &= 0.364 + 0.282 \times 0.720 + 1.689 \times 1.123 - 0.372 \times 2.610 = 0.364 + 0.203 + 1.675 - 0.970 = 1.272 = \\ &10^{1.272} = \mathbf{18.70 \mu\text{g/L}} \end{aligned}$$

**Model 8:**

$$\log(\text{THM}) = 0.154 + 0.267\log(\text{Chlorides}) + 1.252\log(\text{WT}) - 0.532\log(\text{TDS}) + 0.431\log(\text{EC})$$

$$\begin{aligned} \log(\text{THM}) &= 0.154 + 0.267\log(5.26) + 1.252\log(13.56) - 0.532\log(407.67) + 0.431\log(250.89) = \\ &= 0.154 + 0.267 \times 0.720 + 1.252 \times 1.123 - 0.532 \times 2.610 + 0.431 \times 2.399 = 1.3976 = 10^{1.3976} = \end{aligned}$$

**24.98  $\mu\text{g/L}$**

**Model 9:**





$$\log(\text{THM}) = 0.340 + 0.258\log(\text{Chlorides}) + 1.030\log(\text{WT}) - 0.516\log(\text{TDS}) + 0.477\log(\text{EC}) + 0.153\log(\text{RC})$$


$$\begin{aligned} \log(\text{THM}) &= 0.340 + 0.258\log(5.26) + 1.030\log(13.56) - 0.516\log(407.67) + 0.477\log(250.89) \\ &+ 0.153\log(0.20) = 0.340 + 0.258 \times 0.720 + 1.030 \times 1.123 - 0.516 \times 2.610 + 0.477 \times 2.399 + 0.153 \times (-0.698) = 1.3732 = 10^{1.3732} = \mathbf{23.61 \mu\text{g/L}} \end{aligned}$$

**Model 10:**

$$\text{THM} = 2.188(\text{Chlorides})^{0.258} \cdot (\text{WT})^{1.030} \cdot (\text{EC})^{0.477} \cdot (\text{RC})^{0.153} \cdot (\text{TDS})^{-0.516}$$

$$\begin{aligned} \text{THM} &= 2.188(5.26)^{0.258} \cdot (13.65)^{1.030} \cdot (250.89)^{0.477} \cdot (0.20)^{0.153} \cdot (407.67)^{-0.516} = \\ &= 2.188 \times 1.534 \times 14.76 \times 13.949 \times 0.781 \times 0.044 = \mathbf{24.29 \mu\text{g/L}} \end{aligned}$$

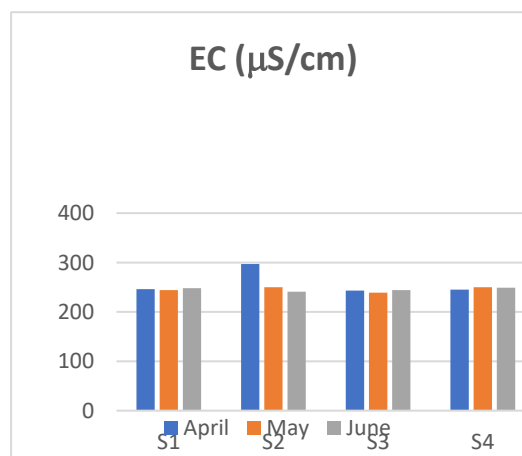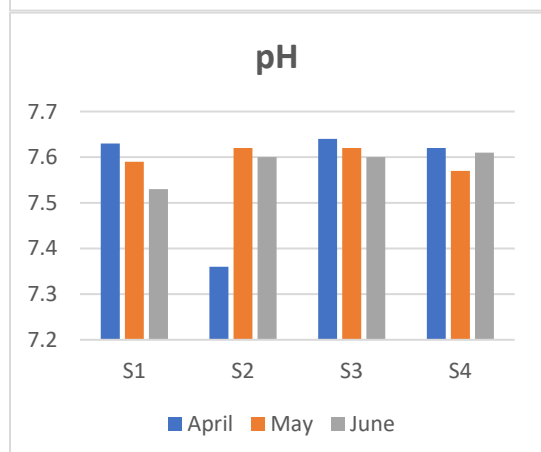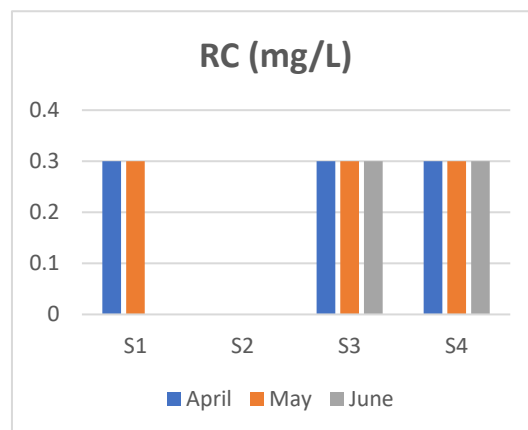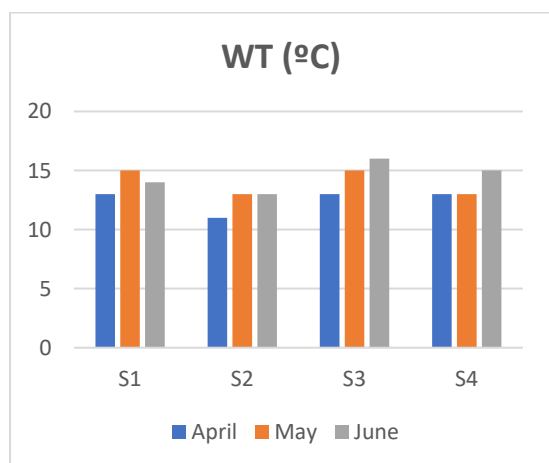

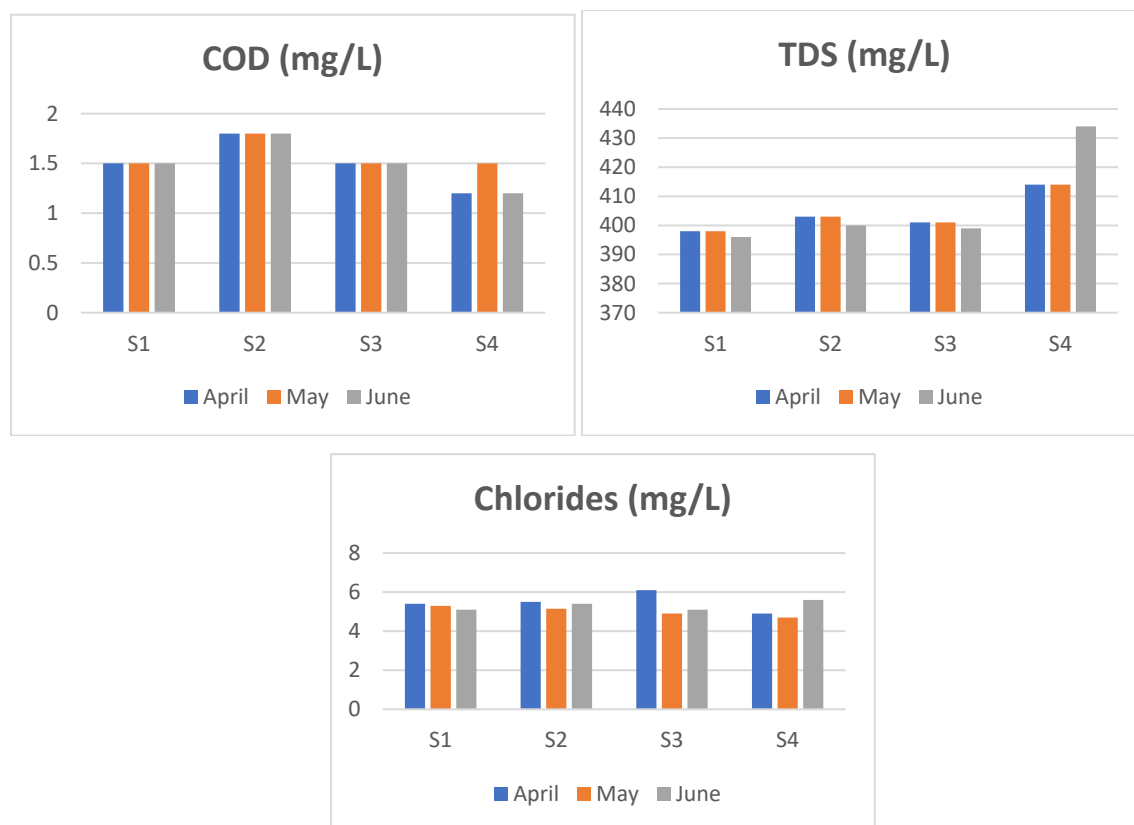

In order to obtain a more reliable result for predicting the content of THMs for the spring season, we obtained the average value with standard deviation of THMs, as in the Table 1.

**Table1.** Calculation of the mean value with standard deviation of THMs of ten models.

Model	Values of THMs content from models ( $\mu\text{g/L}$ )
1	24.78
2	22.71
3	23.88
4	23.83
5	28.51
6	58.67
7	18.70
8	24.98
9	23.61
10	24.29
Average value	27,40
Standard deviation	10,67
<b>Predicted Content of THMs</b>	<b><math>27.40 \pm 10.67 \mu\text{g/L}</math></b>

#### 4. CONCLUSION

From the results obtained during the analysis of the physico-chemical parameters, namely the prediction of THMs in the city of Struga, we can conclude that:

- The parameter values were in accordance with the recommended values of the State Regulation on the quality of drinking water (except WT);
- According to the content of inorganic and organic substances, the drinking water of the city of Struga is of good quality and can be used for drinking;

- The models used for the prediction of THMs have given successful results;
- The recommended value for THMs according to the National and European Regulation is 100 µg/L;
- The prediction of THMs content with the 10 models for the spring season of 2021 was  $27.40 \pm 10.67$  µg/L;
- So, for the research period THMs do not pose a risk to the health of the population;
- THMs reduction should be encouraged, but without compromising drinking water disinfection; and
- We recommend the relevant authorities to take preventive steps to keep THMs under control.

#### REFERENCES

- [1] Bujar H. Durmishi (2013). Study of the variation of the content of trihalomethanes (THMs) in the drinking water of the city of Tetova with advanced analytical methods, *PhD, University of Tirana*, Tirana, R. of Albania, 100-131.
- [2] Krasner, S. W., McGuire, M. J., Jacangelo, J. G., Patania, N. L., Reagan, K. M., and Aieta, M. E. (1989). The Occurrence of Disinfection By-products in US Drinking Water. *Journal of American Water Works Association*, 81, (8), 41-53.
- [3] Graves, C. G., Matanoski, G. M., Tardiff, R. G. (2002). Weight of evidence for an association between adverse reproductive and developmental effects and exposures to disinfection by-products: A critical review. *Regul Toxicol Pharmacol*, 34, 103–124.
- [4] Rook, J. J. (1974). Formation of haloforms during chlorination of natural water. *Water Treat. Exam.* 23, 234-240.
- [5] Golfinopoulos, Spyros K, Nikos K. Xilourgidis, Maria N. Kostopoulou, and Themistokles D. Lekkas. (1998). Use of a multiple regression model for predicting trihalomethane formation. *Water Resources*, 32, Number 9, 2821-2829
- [6] Rodriguez, M. J., and Serodes, J. B. (2001). Spatial and temporal evolution of trihalomethanes in three water distribution systems. *Water Research*, 35, (6), 1572–1586.
- [7] Villanueva C. M., Cantor K. P., Grimalt J. O., Castaño-Vinyals G., Malats N., Silverman D. (2006). Assessment of lifetime exposure to trihalomethanes through different routes. *Occup Environ Med*, 63, 273–7.
- [8] Elshorbagy, W. (2000). “Kinetics of THM Species in Finished Water”. *J. Water Resour. Plng. and Mgmt., ASCE*, 126 (1), 21-28.
- [9] Clark, R. M., and Sivaganesan Mano. (1998). Predicting Chlorine Residuals and Formation of TTHMs in Drinking Water. *J. Environ. Engrg.*, 124 (12), 1203-1210.
- [10] Montgomery, W. (1993). *Mathematical modelling of the formation of THMs and HAAs in chlorinated natural waters*. Denver, Colorado, AWW.
- [11] Clark, R. M., Pourmoghaddas, H., Wymer, L., and Dressman, R. (1996). Modeling the Kinetics of Chlorination By-products Formation: The Effects of bromide. *J. SRT-aqua*, 45(3), 112-119.
- [12] Karimi, A., and Singer, P. (1991). Trihalomethane Formation in Open Reservoirs. *J. AWWA*, 83(3), 84-88.
- [13] Canale, R., Chapara, C., Amy, G., and Edwards, M. (1997). Trihalomethane Precursor Model for Lake Youngs. *Washington Journal of Environmental Engineering, ASCE*, 123 (5), 259-265.
- [14] Government of the Republic of Macedonia. (2004). *State Drinking Water Regulation, Official Gazette No. 57/2004*. Skopje: Government of the Republic of Macedonia.

**Citation:** Bujar H. Durmishi, “Application of Mathematical Models for Predicting the Trihalomethanes Content in Drinking Water in the City of Struga, North Macedonia”, *International Journal of Research in Environmental Science (IJRES)*, vol. 9, no. 1, pp. 18-25, 2023. Available: DOI: <http://dx.doi.org/10.20431/2454-9444.0901003>

**Copyright:** © 2023 Authors. This is an open-access article distributed under the terms of the Creative Commons Attribution License, which permits unrestricted use, distribution, and reproduction in any medium, provided the original author and source are credited.