

A Remote Sensing Image Segmentation Method Based on Spectral and Texture Information

Syed.Sameena

PG scholar, Dept of ECE
Gokula Krishna College of Engineering
JNTUA, Sullurpeta, Andhra Pradesh, India
sdsameena786@gmail.com

T.Anitha

Assoc. prof, Dept of ECE,
Gokula Krishna College of Engineering
JNTUA, Sullurpeta, Andhra Pradesh, India
anithat777@gmail.com

Abstract: Remote sensing performance tends to many features which are including change detection, ortho rectification, spectral analysis; image classification depends on the pixel based on reflectance into different land cover classes. It can be used to read specialized file formats that contain sensor image data, geo-referencing information, and sensor Meta data. We have presented a new method for remote sensing image segmentation, which utilizes both spectral and texture information. Remote sensing image is taken as the input and converted into the gray scale image. Then the gray scale image is filtered by using Laplacian of Gaussian (LOG) filters. After that, the features are enhanced by using local spectral histogram. Then we have clustered the image using k-mean clustering. Moreover, the clustered image is segmented by using RGB colors. The SVD is calculated for error estimation and plot in the graph. The overall performance is good. Linear filters are used to provide enhanced spatial patterns. For each pixel location, we have computed combined spectral and texture features using local spectral histograms, which concatenate local histograms of all input bands. We have regarded each feature as a linear combination of several representative features, each of which corresponds to a segment. Segmentation is given by estimating combination weights, which indicate segment ownership of pixels. We have presented segmentation solutions where representative features are either known or unknown. We also show that feature dimension can be greatly reduced via subspace projection. The scale issue is investigated, and an algorithm is presented to automatically select proper scales, which does not require segmentation at multiple scale levels.

Keywords: Segmentation, Singular Value Decomposition (SVD), Spectral Histogram, Texture.

1. INTRODUCTION

Image segmentation has been extensively studied. In remote sensing, a segmentation method should leverage the advances made in data acquisition, specifically the spectral and spatial resolution capability. Multispectral (MS) images, which are the main type acquired by remote sensing radiometers, provide much enhanced capabilities of characterizing ground objects. Meanwhile, high-resolution images contain rich texture information, which has been shown to improve segmentation results.

Therefore, remote sensing segmentation methods are expected to make use of both spectral and texture information. In this paper, we use local spectral histogram representation which consists of histograms of filter responses in a local window. This representation provides an effective feature to capture both spectral and texture information. However, as a form of texture descriptors, local spectral histograms also suffer from the problems of high dimensionality and boundary localization. To address these problems, we employ a recently proposed segmentation method, which formulates segmentation as multivariate linear regression. This method works across different bands in a computationally efficient way and accurately localizes boundaries. remote sensing images, segmentation is inextricably linked to the scale issue. Conceptually, scale is a “window of perception”. It is well known that meaningful structures and objects exist over a certain range of scales. In image processing, a scale usually refers to the size of the operators or measurement probes used to extract information from image data. Improper scales can lead to over segmentation, where segments correspond to portions of regions, or under segmentation,

Where one segment contains multiple land-cover classes. Due to the inherent multi scale nature of real-world objects, many multiscale segmentation algorithms have been proposed.

However, manual interpretation is typically needed in order to utilize the segmentation results at multiple levels, which inevitably involve subjectivity. Moreover, it has been shown that, in specific cases, single-scale representation might be sufficient and more straightforward.

In this paper, we focus on selecting a single scale:

Based on our new formulation of the segmentation problem, we propose a scale selection method to appropriately characterize spatial patterns and give a controlled smoothing effect.

2. EXISTING SYSTEM

Existing system contains methods automatic segmentation of high resolution images, split-merge plus pixel-wise refinement framework, automatic detection of geo-spatial objects, very high spatial resolution, morphological transformations, semi variograms. Satellite images are automatically segmented which is useful for obtaining more timely and accurate information. Segmentation is realized by comparing similarities between different features of sub-regions. The image can be segmented into different regions that frequently correspond to different land-use or other objects. It can be potentially applied within a broad range of image segmentation. High spatial resolution satellite imagery has become an important source of information for geospatial applications. Automatic segmentation of high-resolution satellite imagery is useful for obtaining more timely and accurate information. In this paper, we develop a method and algorithmic framework for automatically segmenting imagery into different regions corresponding to various features of texture, intensity, and color. The central rationale of the method is that information from the three feature channels are adaptively estimated and integrated into a split-merge plus pixel-wise refinement framework. In the procedure for split-merge and refinement, segmentation is realized by comparing similarities between different features of sub-regions. The similarity measure is based on feature distributions. Without prior knowledge of image content, the image can be segmented into different regions that frequently correspond to different land-use or other objects. Experimental results indicate that the method performs much better in terms of correctness and adaptation than using single feature or multiple features, but with constant weight for each feature.

2.1. Disadvantages

Existing system does not make use of spatial information. The number of clusters cannot usually be obtained directly and automatically. The feature extraction is difficult and the process is more complicated. There are two main problems associated with such texture descriptors framework.

First, applying multiple filters to spectral bands generates high-dimensional features. As a result, not only is the computational cost high, but many clustering methods also fail to work for high-dimensional data. The second problem stems from texture descriptors generated from the image windows crossing multiple regions, which cause difficulty in localizing region boundaries.

Morphological operations have limited forms and, thus, lack the ability to describe complex textures.

3. PROPOSED SYSTEM

Proposed system consist methods of scale-selection method, Laplacian of Gaussian (LOG) filters, K-mean clustering, Singular value decomposition, Local Automatic scaling, Spectral histogram, combination of spectral and texture features. Remote sensing image is used as an input image for segmenting the image. First, the input image is converted into the gray image and then filtered by Laplacian of Gaussian (LOG) filters. Then the filtered image is enhanced by the histogram equalization's-mean clustering algorithm was used for clustering the image. After that the image is segmented by the RGB colors. The SVD is calculated for error estimation based on the size of the image. The overall performance is good.

In Order to develop the project, we compute combined spectral and texture Features using local spectral histograms, which concatenate local histograms of all input bands. We regard each feature as a linear combination of several representative features, each of which corresponds to a segment. Segmentation is given by estimating combination weights, which indicate segment ownership of pixels. We present segmentation solutions where representative features are either known or unknown.

3.1. Advantages

- This method is effective and provides better accuracy.
- This process gives high resolution.
- It will save time and reduce a delay process.
- This representation provides an effective feature to capture both spectral and texture information.
- This method works across different
- Bands in a computationally efficient way and accurately localizes boundaries.
- It has been shown that, in specific cases, single-scale representation might be sufficient and more straightforward and also computational cost low by using the proposed system.

3.2. Comparison Table between Existing and Proposed Methods

Table1. Comparison between existing and proposed method.

EXISTING SYSTEM	PROPOSED SYSTEM
It gives low resolution	It gives High resolution
More complicated	Better accuracy
It is a time delay process.	It saves time and reduces the delay process.
This representation provides an effective feature to capture spectral information	This representation provides an effective feature to capture both spectral and texture information

4. SYSTEM ARCHITECTURE

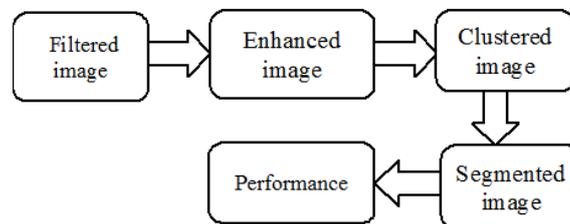


Fig. System Architecture

5. MODULES

- Input image
- Filtered image
- Enhanced image
- Clustered image
- Segmented image
- Performance

5.1. Input Image

Remote sensing images are taken as input to the system and save the images into the computer. After that, the input image is converted into the gray image. In order to improve the quality of the images we normally employ some filtering operations.

5.2. Filtered Image

Then the gray scale image is filtered by using Laplacian of gaussian (LOG) filters. To specify the histogram there are certain set of filters. But in this process we use Laplacian of gaussian (LOG) filters. It is used for the removal of noise.

5.3. Enhanced Image

The images are enhanced by using local spectral histogram. The histogram is taken for all input bands. It provide effective feature for both spectral and texture information for remote sensing images. Then the enhanced image is clustered.

5.4. Clustered Image

K-mean clustering algorithm was used for clustering the image. Simply speaking k-means clustering is an algorithm to classify or to group the objects based on attributes/features into K number of group. K is positive integer number. The grouping is done by minimizing the sum of squares of distances between data and the corresponding cluster centroid.

5.5. Segmented Image

Image segmentation is typically used to locate objects and boundaries in images. The clustered image is then segmented based on the spectral and texture features. The images of segmented boundaries with RGB colors.

5.6. Performance

The SVD is calculated for error estimation based on the size of the image. The SVD is extensively used in image processing for plotting the graph. The overall performance is good.

Table2. Performance of spectral and texture features

Method	Spectral features	Texture features	Proposed method (Automatic Scaling-means clustering)
Accuracy	65%	67%	75%
RMSE	2.53	1.66	0.55
PSNR	53%	59%	67%

6. LOCAL SPECTRAL HISTOGRAM

Based on a local spatial/frequency representation, we employ a spectral histogram as a feature statistic for texture classification. The spectral histogram consists of marginal distributions of responses of a bank of filters and encodes implicitly the local structure of images through the filtering stage and the global appearance through the histogram stage. The distance between two spectral histograms is measured using 2-statistic. The spectral histogram with the associated distance measure exhibits several properties that are necessary for texture classification. A filter selection algorithm is proposed to maximize classification performance of a given dataset. Our classification experiments using natural texture images reveal that the spectral histogram representation provides a robust feature statistic for textures and generalizes well. Comparisons show that our method produces a marked improvement in classification performance. Finally we point out the Relationships between existing texture features and the spectral histogram, suggesting that the latter may provide a unified texture feature. A spectral histogram, defined as the marginal distribution of filter responses, as a quantitative definition for a text on pattern. By matching spectral histograms, an arbitrary image can be transformed to an image with similar textons to the observed. Local spectral Histograms are the basis for numerous spatial domain processing techniques.

The histogram manipulation can be used effectively for image enhancement. These Histograms can be used to provide useful image statistics. The Information derived from histograms are quite useful in other image processing applications, such as image compression and segmentation. Image histogram is a graphical representation of the intensity distribution of an image. It quantifies the number of pixels for each intensity value considered. This method usually increases the global contrast of many images, especially when the usable data of the image is represented by close contrast values. Through this adjustment, the intensities can be better distributed on the histogram. This allows for areas of lower local contrast to gain a higher contrast. Histogram equalization accomplishes this by effectively spreading out the most frequent intensity values.

Given an input image window \mathbf{W} and a bank of filters $\{F^{(\alpha)}, \alpha = 1, 2, \dots, K\}$, we can compute a subband image $\mathbf{W}^{(\alpha)}$ for each filter $F^{(\alpha)}$ through convolution. For $\mathbf{W}^{(\alpha)}$, we have the corresponding histogram, which is denoted by $H^{(\alpha)}_{\mathbf{W}}$. In this paper, we use 11 equal-width bins for each filter response. The spectral histogram is defined as the concatenation of the histograms of different filter responses [21], i.e.,

$$H_{\mathbf{W}} = 1/|\mathbf{W}| (H^{(1)}_{\mathbf{W}}, H^{(2)}_{\mathbf{W}}, \dots, H^{(K)}_{\mathbf{W}})$$

Where $|\cdot|$ denotes cardinality. The size of the window is referred to as the integration scale. The spectral histogram characterizes both local patterns via filtering and global patterns through a

histogram. It has been shown that, with properly selected filters, the spectral histogram is sufficient to capture

Texture appearance [15].

To specify a spectral histogram, one needs to choose a set of filters. Based on previous studies, three types of filters are used in this paper, namely, the intensity filter, Laplacian of Gaussian (LoG) filters, and Gabor filters. The intensity filter is the Dirac delta function, which gives the intensity value at a pixel location. LoG filters are given by

$$\text{LoG}(x, y|\sigma) = (x^2 + y^2 - 2\sigma^2)e^{-x^2+y^2/2\sigma}.$$

We use an even-symmetric Gabor filter, which has the following form:

$$\text{Gabor}(x, y|\sigma, \theta) = e^{-1/2\sigma^2 [(x \cos \theta + y \sin \theta)^2 + (-x \sin \theta + y \cos \theta)^2]} \times \cos [2\pi/\lambda(x \cos \theta + y \sin \theta)]$$

where θ defines the orientation of the filter, and the ratio σ/λ is set to 0.5. For both types of filters, σ determines the scale.

The method is useful in images with backgrounds and foregrounds that are both bright or both dark. In particular, the method can lead to better views of bone structure in x-ray images, and to better detail in photographs that are over or under-exposed. A key advantage of the method is that it is a fairly straightforward technique and an invertible operator. So in theory, if the histogram equalization function is known, then the original histogram can be recovered. The calculation is not computationally intensive. A disadvantage of the method is that it is indiscriminate.

It may increase the contrast of background noise, while decreasing the usable signal. In scientific imaging where spatial correlation is more important than intensity of signal (such as separating DNA fragments of quantized length), the small signal to noise ratio usually hampers visual detection.

Histogram equalization often produces unrealistic effects in photographs; however it is very useful for scientific images like thermal, satellite or x-ray images, often the same class of images that user would apply false-color to. Also histogram equalization can produce undesirable effects (like visible image gradient) when applied to images with low color depth. For example, if applied to 8-bit image displayed with 8-bit gray-scale palette it will further reduce color depth (number of unique shades of gray) of the image. Histogram equalization will work the best when applied to images with much higher color depth than palette size, like continuous data or 16-bit gray-scale images.

7. K-MEAN CLUSTERING

In a general sense, k-means clustering works by assigning data points to a cluster centroid, and then moving those cluster centroids to better fit the clusters themselves. To run an iteration of k-means on our dataset, we first randomly initialize k number of points to serve as cluster centroids. A common method, employed in my implementation, is to pick k data points and affix the centroid in the same place as those points. Then we assign each data point to its nearest cluster centroid. Finally, we update the cluster centroid to be the mean value of the cluster. The assignment and updating step is repeated, minimizing fitting error until the algorithm converges to a local optimum. It's important to realize that the performance of k-means depends on the initialization of the cluster centers; a bad choice of initial seed, e.g. outliers or extremely close data points, can easily cause the algorithm to converge on less than globally optimal clusters. For this reason, it's usually a good idea to iterate k-means multiple times and choose the clustering that minimizes overall error. When looking at data for the purpose of classification, there are several ways to approach classifying the examples in a given set. For example, we have parametric approaches, semi-parametric approaches, and nonparametric approaches. The spherical k-means algorithm, i.e., the k-means algorithm with cosine similarity, is a popular method for clustering high-dimensional text data. In this algorithm, each document as well as each cluster mean is represented as a high-dimensional unit-length vector. However, it has been mainly used in batch mode. That is, each cluster mean vector is updated, only After all document vectors being assigned, as the (normalized) average of all the document vectors assigned to that cluster. This paper investigates an online version of the spherical k-means algorithm based on the well-known Winner-Take-All competitive learning. In this online algorithm, each cluster centroid is incrementally updated given a document. We demonstrate that the online spherical k-means algorithm can achieve significantly better clustering results than the batch version, especially when an annealing-type learning rate schedule is used. We also present heuristics to improve the speed, yet almost without loss of clustering quality. This algorithm aims at minimizing an objective function, in this case a squared error function. The objective function

$$J = \sum_{j=1}^k \sum_{i=1}^n \left\| x_i^{(j)} - c_j \right\|^2$$

Where $\left\| x_i^{(j)} - c_j \right\|^2$ is a chosen distance measure between a data point $x_i^{(j)}$ and the cluster centre c_j , is an indicator of the distance of the n data points from their respective cluster centers.

8. EXPERIMENTAL RESULTS AND COMPARISONS

We first test our method on a set of GeoEye-1 images with a spatial resolution of 0.5 m. The images have three bands (red, green, and blue), and the red band is shown in the top row in Fig. 2. For each image, we use three filters: the intensity filter, LOG (s), and LOG (2s). Filter scale s and the integration scale are determined using the automatic method.. The only free parameter is the number of segments, which is set to 3, 2, and 3, respectively, for the three images. The results are presented in Fig. 2, where the top row shows the segment boundaries overlaid on the red-band images, and the bottom row shows region labelling.



Fig1. Front Screen for the project



Fig2. Grey image representation

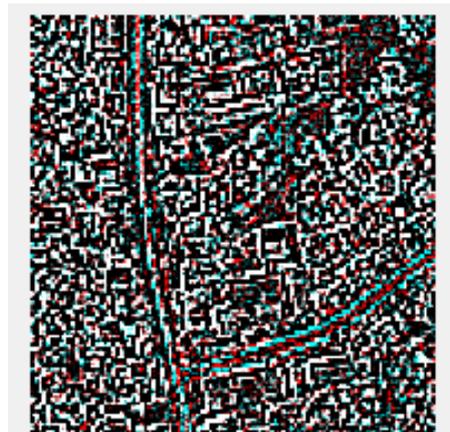


Fig3. Filtered image representation

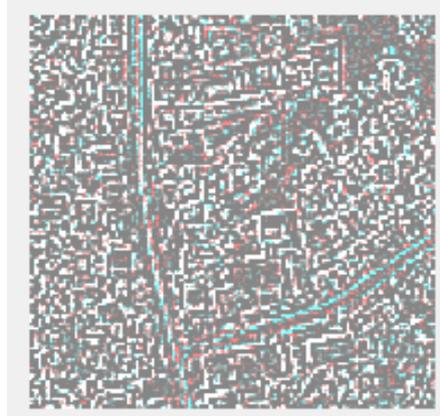


Fig4. *Enhancing image representation*

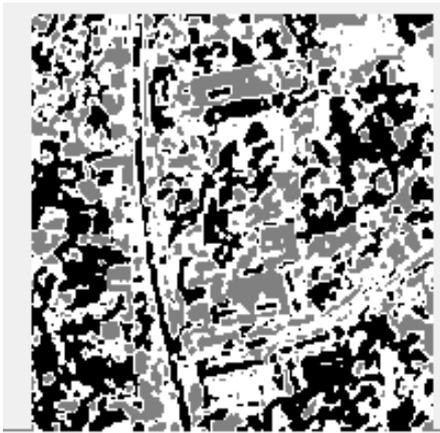


Fig5. *Clustered image representation*


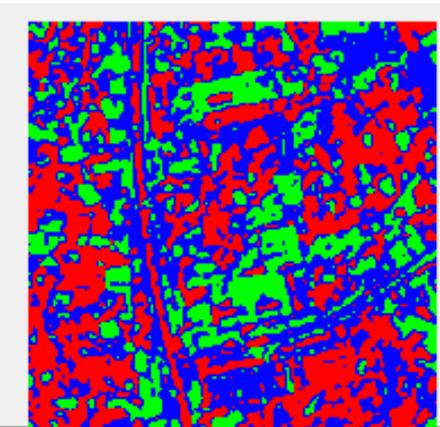


Fig6. *After Segmentation Image*

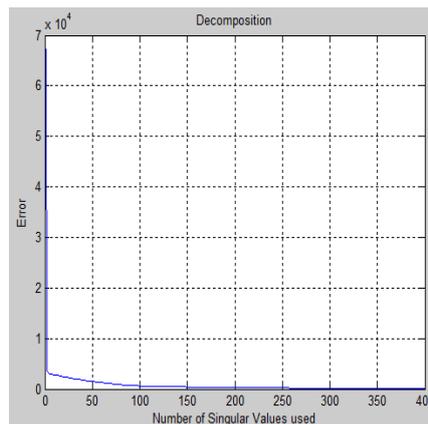

Graph1. *Decomposition*

9. CONCLUSION AND FUTURE ENHANCEMENT

The remote sensing image is segmented and it is useful in many of the processes. The remote sensing image is segmented based on RGB colors. The SVD is calculated for error estimation and plot the graph. The overall performance is good. In this project we have presented a new method for segmenting remote sensing images based on spectral and texture features. We use local spectral histograms to provide combined features. By regarding each feature as a linear combination of several representative features, we formulate the segmentation problem as a multivariate linear regression, which can be solved by least squares estimation. We have also proposed methods based on SVD to automatically estimate representative features and select proper scales. The process can be further developed by the segmentation of multi resolution remote-sensing images, which fits into the general split-and-merge paradigm. The whole process is based on a recently developed hierarchical model of the image, which accurately describes its textural properties. In order to reduce the computational burden and preserve contours at the highest spatial definition, the algorithm works on the high-resolution panchromatic data first, using low-resolution full spectral information only at a later stage to refine the segmentation. It is completely unsupervised, with just a few parameters set at the beginning, and its final product is not a single segmentation map but rather a sequence of nested maps which provide a hierarchical description of the image.

REFERENCES

- [1] T. Blaschke, "Object based image analysis for remote sensing," *ISPRS J. Photogramm. Remote Sens.*, vol. 65, no. 1, pp. 2–16, Jan. 2010.
- [2] S. Ryherd and C. Woodcock, "Combining spectral and texture data in the segmentation of remotely sensed images," *Photogramm. Eng. Remote Sens.*, vol. 62, no. 2, pp. 181–194, Feb. 1996.
- [3] M. Kim, M. Madden, and B. Xu, "GEOBIA vegetation mapping in Great Smoky Mountains National Park with spectral and non-spectral ancillary information," *Photogramm. Eng. Remote Sens.*, vol. 76, no. 2, pp. 137–149, 2010.
- [4] X. Hu, C. V. Tao, and B. Prenzel, "Automatic segmentation of high-resolution satellite imagery by integrating texture, intensity and color features," *Photogramm. Eng. Remote Sens.*, vol. 71, no. 12, pp. 1399–1406, 2005.
- [5] R. Trias-Sanz, G. Stamon, and J. Louchet, "Using colour, texture, and hierarchical segmentation for high-resolution remote sensing," *ISPRS J. Photogramm. Remote Sens.*, vol. 63, no. 2, pp. 156–168, Mar. 2008.
- [6] H. G. Akcay and S. Aksoy, "Automatic detection of geospatial objects using multiple hierarchical segmentations," *IEEE Trans. Geosci. Remote Sens.*, vol. 46, no. 7, pp. 2097–2111, Jul. 2008.
- [7] J. A. Benediktsson, M. Pesaresi, and K. Arnason, "Classification and feature extraction for remote sensing images from urban areas based on morphological transformations," *IEEE Trans. Geosci. Remote Sens.*, vol. 41, no. 9, pp. 1940–1949, Sep. 2003.
- [8] A. Tzotsos, K. Karantzalos, and D. Argialas, "Object-based image analysis through nonlinear scale-space filtering," *ISPRS J. Photogramm. Remote Sens.*, vol. 66, no. 1, pp. 2–16, Jan. 2011.
- [9] C. Coburn and A. C. B. Roberts, "A multiscale texture analysis procedure for improved forest stand classification," *Int. J. Remote Sens.*, vol. 25, no. 20, pp. 4287–4308, 2004.
- [10] J. R. Carr and F. P. Miranda, "The semivariogram in comparison to the co-occurrence matrix for classification of image texture," *IEEE Trans. Geosci. Remote Sens.*, vol. 36, no. 6, pp. 1945–1952, Nov. 1998.
- [11] N. Li, H. Huo, and T. Fang, "A novel texture preceded segmentation algorithm for high-resolution imagery," *IEEE Trans. Geosci. Remote Sens.*, vol. 48, no. 7, pp. 2818–2828, Jul. 2010.
- [12] D. Martin, C. Fowlkes, and J. Malik, "Learning to detect natural image boundaries using local brightness, color, and texture cues," *IEEE Trans. Pattern Anal. Mach. Intell.*, vol. 26, no. 5, pp. 530–549, May 2004.

- [13] S. K. Meher, B. Uma Shankar, and A. Ghosh, "Wavelet-feature-based classifiers for multispectral remote-sensing images," *IEEE Trans. Geosci. Remote Sens.*, vol. 45, no. 6, pp. 1881–1886, Jun. 2007.
- [14] J. Malik, S. Belongie, T. Leung, and J. Shi, "Contour and texture analysis for image segmentation," *Int. J. Comput. Vis.*, vol. 43, no. 1, pp. 7–27, Jun. 2001.
- [15] X. Liu and D. L. Wang, "A spectral histogram model for texton modeling and texture discrimination," *Vis. Res.*, vol. 42, no. 23, pp. 2617–2637, Oct. 2002.
- [16] J. Yuan, D. L. Wang, and R. Li, "Image segmentation using local spectral histograms and linear regression," *Pattern Recognit. Lett.*, vol. 33, no. 5, pp. 615–622, Apr. 2012.
- [17] D. J. Marceau and G. J. Hay, "Remote sensing contribution to scale issue," *Can. J. Remote Sens.*, vol. 25, no. 4, pp. 357–366, 1999.
- [18] B. Johnson and Z. Xie, "Unsupervised image segmentation evaluation and refinement using a multi-scale approach," *ISPRS J. Photogramm.*

AUTHORS' BIOGRAPHY



Syed.Sameena, received the B.Tech degree in Electronics and Communication Engineering from Quba College of Engineering and Technology, Nellore, University of JNTUA in 2011. She is currently working towards the Master's Degree in Digital Electronics and Communication Systems in Gokula Krishna College of Engineering, University of JNTUA. Her interest lies in the areas of Image processing, Embedded System, and Digital Communication.



T.Anitha, received her B.Tech degree in ECE from Narayana Engineering College, Gudur, University of JNTUH in 2007, M.Tech degree from Annamacharya Institute of Technology and Sciences, University of JNTUA in 2010. Presently she is working as an Associate Professor in the Department of ECE at Gokula Krishna College of Engineering, Sullurpet.